




JOURNAL OF CIVIL ENGINEERING

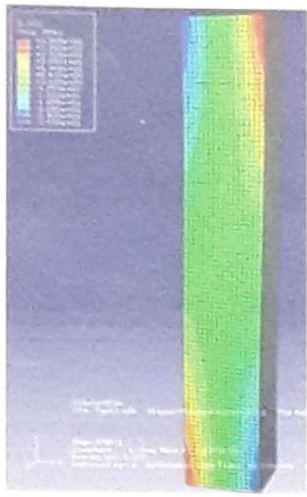

47 Editor's Note
Tavio

Technical Papers

Transportation System

48 The Effects of Side Friction Reduction to the Performance of Unsignalized Intersection (Case Study in Bandung, Indonesia)
A. Caroline Sutandi and Novaliya

Structural Analysis

54 Structural System Simulation using Grid-Computing Framework
Data Iranata and Radityo Anggoro

Hydraulics Engineering

68 Appraisal Analysis of Irrigation System Management Based on Sustainable Development Concept in Tilong Irrigation Area of Kupang Regency
Lidya Kini, Nadjadji Anwar, and Theresia Sri Sidharti

76 Surface Water Modeling at Lamong Bay
Cahya Buana, Hera Widyastuti, Wahyu Herijanto, Catur Arif Prastyanto, Anak Agung Gde Kartika, Budi Rahardjo, and Istiar

Dynamic Foundation

90 Harmonic Response Evaluation of Frame-Typed Machinery Foundation Using Fixed-End Supports and Soil-Structure Interaction
Muhammad Imaduddin, Ananta Sigit Sidharta, and Hidayat Soegihardjo M.

98 Index



ITS
Institut
Teknologi
Sepuluh Nopember

Journal of CIVIL ENGINEERING

Editorial Board

Dr. Ir. HidayatSoegihardjo, M.S.
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Managing Editor

Ir. Tawio, M.S., Ph.D.
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Associate Editors

Ir. Ananta S. Sidharta, M.Sc., Ph.D.
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Prof. Dr. Ir. I Gusti Putu Raka
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Ir. Kusno Adi Sambowo, Ph.D.
*Universitas Sebelas Maret Surakarta
Surakarta, Indonesia*

Prof. Ir. Yoyong Arfiadi, M.Eng., Ph.D.
*Universitas Atma Jaya Yogyakarta
Yogyakarta, Indonesia*

Dr. Ir. Bambang Yulistiyanto
*Universitas Gajah Mada
Yogyakarta, Indonesia*

Ir. A. Caroline Sutandi, M.T., Ph.D.
*Universitas Katolik Parahyangan
Bandung, Indonesia*

Prof. Ir. Indrasurya B. Mochtar, M.Sc., Ph.D.
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Ir. Sri Sunarjono, M.T., Ph.D.
*Universitas Muhammadiyah Surakarta
Surakarta, Indonesia*

Dr. Ir. Iswandaru Widyatmoko, M.Sc., FIAT., MIHT.
Scott Wilson, United Kingdom

Dr. Ir. Hidayat Soegihardjo, M.S.
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Prof. Dr. Ir. Nadjadji Anwar, M.Sc.
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Dr. Ir. Edijatno
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Yusron Sa'adi, S.T., M.Sc., Ph.D.
*Universitas Mataram
Mataram, Indonesia*

Prof. Dr. Ir. Morisco, IPU.
*Universitas Gajah Mada
Yogyakarta, Indonesia*

Dr. Ir. Ade Lisantono, M.Eng.
*Universitas Atma Jaya Yogyakarta
Yogyakarta, Indonesia*

Prof. Benjamin Lumantarna, M.Eng, Ph.D.
*Universitas Kristen Petra
Surabaya, Indonesia*

Ir. Mochammad Teguh, MSCE., Ph.D.
*Universitas Islam Indonesia
Yogyakarta, Indonesia*

Dr. Ir. Ahmad Rifa'i
*Universitas Gajah Mada
Yogyakarta, Indonesia*

Ir. Gogot Setiabudi, M.Sc., Ph.D.
*Universitas Kristen Petra
Surabaya, Indonesia*

Ir. Tawio, M.S., Ph.D.
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Prof. Ir. Noor Endah, M.Sc., Ph.D.
*Sepuluh Nopember Institute of Technology
Surabaya, Indonesia*

Dr. Ir. Herlien D. Setio
*Institut Teknologi Bandung
Bandung, Indonesia*

Ir. Peter Kaming, M.Eng, Ph.D.
*Universitas Atma Jaya Yogyakarta
Yogyakarta, Indonesia*

Ir. A. Koesmargono, M.C.M., Ph.D.
*Universitas Atma Jaya Yogyakarta
Yogyakarta, Indonesia*

Ir. Muhamad Abduh, M.Sc., Ph.D.
*Institut Teknologi Bandung
Bandung, Indonesia*

Dr. techn. Ir. Sholihin As'ad, M.T.
*Universitas Negeri Semarang
Semarang, Indonesia*

Stefanus Adi Kristiawan, S.T. M.Sc. Ph.D.
*Universitas Negeri Semarang
Semarang, Indonesia*

Reviewers

Pamuda Pudji Suryadi, S.T., M.Eng.
*Universitas Kristen Petra
Surabaya, Indonesia*

Ir. Abdul Rochman, M.T.
*Universitas Muhammadiyah Surakarta
Surakarta, Indonesia*

Umboro Lasmino, S.T., M.Sc.
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Anak Agung Gde Kartika, S.T., M.Sc.
*Institut Teknologi Sepuluh Nopember (ITS)
Surabaya, Indonesia*

Ir. Jaji Abdurrosyid, M.T.
*Universitas Muhammadiyah Surakarta
Surakarta, Indonesia*

Purwanti Sri Pudyastuti, S.T., M.Sc.
*Universitas Gajah Mada
Yogyakarta, Indonesia*

Assistant Editor and Production

Dimas Widya L. Pamungkas, S.Kom.

Administration Staff

Susanti, S.T.

Endang Trismiati, A.Md.



ITS
Institut
Teknologi
Sepuluh Nopember

ISSN 2086 - 1206

Journal of CIVIL ENGINEERING

November 2009

Volume 29 Number 2

47 EDITOR'S NOTE

Tavio

TECHNICAL PAPER

Transportation System

- 48 The Effects of Side Friction Reduction to the Performance of Unsignalized Intersection (Case Study in Bandung, Indonesia)

A. Caroline Sutandi and Novaliya

Structural Analysis

- 54 Structural System Simulation using Grid-Computing Framework

Data Iranata and Radityo Anggoro

Hydraulics Engineering

- 68 Appraisal Analysis of Irrigation System Management Based on Sustainable Development Concept in Tilong Irrigation Area of Kupang Regency

Lidya Kini, Nadjadji Anwar, and Theresia Sri Sidharti

- 76 Surface Water Modeling at Lamong Bay

Cahya Buana, Hera Widyastuti, Wahyu Herijanto, Catur Arif Prastyanto, Anak Agung Gde Kartika, Budi Rahardjo, and Istiar

Dynamic Foundation

- 90 Harmonic Response Evaluation of Frame-Typed Machinery Foundation using Fixed-End Supports and Soil-Structure Interaction

Muhammad Imaduddin, Ananta Sigit Sidharta, and Hidayat Soegihardjo M.

- 98 Index

Office

Secretariat of ITS Journal of Civil Engineering
Department of Civil Engineering
Faculty of Civil Engineering and Planning
Sepuluh Nopember Institute of Technology
ITS Campus, Keputih, Sukolilo, Surabaya
60111

Indonesia

Phone: +62-31-5931223

Fax: +62-31-5927650

Email: journal-services@ce.its.ac.id

Website: journal.ce.its.ac.id

Publishing

ITS Press

Jl. Teknik Perkapalan Blok K-1

Kampus ITS, Sukolilo, Surabaya 60111,

Telp./Fax. +62-31-5999 490

Email: itspress@its.ac.id

Website: www.itspress.its.ac.id

THE EFFECTS OF SIDE FRICTION REDUCTION TO THE PERFORMANCE OF UNSIGNALIZED INTERSECTION (CASE STUDY IN BANDUNG, INDONESIA)

by A. Caroline Sutandi^a and Novaliya^b

ABSTRACT

Unsignalized intersections, which are locations, with high potential traffic congestion, are the largest number of intersections in large cities in developing country such as Indonesia. Moreover, a number of side frictions worsen traffic congestion and then decrease performance of intersection. Some Regulator traffic signs have been installed to reduce traffic congestion at these locations. However, road users especially angkot (local public transportation mode) drivers ignored the signs. The purpose of this paper is to analyze the effects of side friction reduction to the performance of the intersection. Unsignalized intersection at Rajawali-Dadali in Bandung, Indonesia was used as a case study. Results of this paper showed that at the intersection with capacity of around 4000 pcu/hour, degree of saturation of 0.91 and delay of 15.3 second/pcu, traffic signs alone were not effective. The presence of police officer increased 8.46 percent of capacity, decreased 2.72 percent of degree of saturation, and decreased 4.93 percent of delay at the intersection. However, since the presence of police officers are not always available even during peak hours, it is recommended that the unsignalized intersections with high degree of congestions be changed into signalized intersections.

KEYWORDS: *angkot drivers; performance of unsignalized intersection; side friction reduction; traffic congestion; unsignalized intersection.*

INTRODUCTION

Bandung is the capital city of West Java Province and it lies 180 km from Jakarta, the capital city of Indonesia. Bandung is a city with the third largest population in Indonesia, after Jakarta and Surabaya. The area of Bandung is 16,730 ha and population of 2,364,312 million with 1.06 percent annual growth rate.¹ The road infrastructure density of Bandung is only 3 percent of the city area and has to serve 1,207,455 vehicles excluding 2,253,379 motorcycles.²

In addition to signalized intersections, most of intersections in Bandung are unsignalized intersections. With this condition, traffic congestion occurs at many intersections, especially at unsignalized intersections. Rajawali-Dadali is one of unsignalized intersections in Bandung that is usually congested. One of reasons that cause traffic congestion at intersection is side friction, due to for examples: parking activities near intersection and activities of angkot (local public transportation mode) drivers who are usually picking up and dropping off passengers near intersection.

The condition reflects poor adherence of the drivers to the traffic regulation.³

It is hoped that reduction of side frictions may reduce traffic congestion and then increase the performance of the intersection. This is the main purpose of the study. In

order to reach the purpose, identification of existing side frictions at intersection, how to reduce the side friction, and evaluation of performance of the intersection before and after side friction reduction are crucial to discuss. Afterwards, recommendation for improvement to increase the performance of intersection is given.

RESEARCH SIGNIFICANCE

Unsignalized intersections are the largest number of intersections in large city in developing country such as Indonesia. Since these locations have high potential traffic congestion, efforts to reduce the traffic congestion and increase the performance of intersection are crucial. If regulatory traffic signs and presence of police officers cannot reduce traffic congestion, it is recommended to change this kind of intersections into signalized intersections. The results of this study is belief not only beneficial to unsignalized intersections in Bandung, but also to other large cities in Indonesia or in other developing countries with similar traffic conditions.

LITERATURE REVIEW

Intersection can be defined as the public area where two or more roads join or cross, including the roadway and roadside facilities for traffic movement. Because intersection has to be shared by everybody using it, intersection needs to be designed with great care, taking into consideration efficiency, safety, speed, cost of operation, and capacity.⁴⁻⁶ In general, there are three types of intersections: (1) at grade intersection, (2) grade separation intersection without ramps, and (3) interchanges. Intersection at grade can be classified into two types i.e. signalized intersection and unsignalized intersection.⁷ The unsignalized intersection is the focus of this study.

^aLecturer, Department of Civil Engineering, Faculty of Engineering, Parahyangan Catholic University, Ciumbuleuit 94 Bandung 40141 Indonesia

^bStudent, Department of Civil Engineering, Faculty of Engineering, Parahyangan Catholic University, Ciumbuleuit 94 Bandung 40141 Indonesia

Note. The manuscript for this paper was submitted for review and possible publication on Sept 28, 2009; approved on October 11, 2009. Discussion open until January 2011. This paper is part of the ITS Journal of Civil Engineering, Vol. 29, No. 2, November 2009. © ITS Journal of Civil Engineering, ISSN 2086-1206/2009.

Controls at Unsignalized Intersection

Traffic control devices include marking, signs, and signal. Each of this can be used alone or in combination if necessary. They are primary means of regulating, warning, or guiding traffic on all streets or highways. Traffic control devices are designed to provide safe and efficient functioning of intersections by separating conflicting vehicle streams by time.⁸ At unsignalized intersections, marking, roundabouts, and traffic signs are used, for examples yield or stop signs assign priority to particular traffic streams relative to other streams at the same intersection. Specifically, marking and traffic signs fulfill the following purposes: the regulation of traffic (e.g. speed limit), turn prohibition, stop prohibition, alerting drivers and pedestrians regarding roadway conditions, and guiding traffic along appropriate routes to reach trip destinations through signs and markings.^{3,9}

Performance Measurements at Unsignalized Intersection

The performance of unsignalized intersection can be evaluated in term of how well the objectives of the treatment have been satisfied. The main measurements are capacity, degree of saturation, and delay.^{3,9} Capacity is calculated as the product between a base capacity (C_0) for a set of predetermined (ideal) conditions and corrections factors (F), taking account of the influence of the capacity of the actual site conditions, usually the capacity is termed vehicles per hour or passenger car unit per hour. Degree of saturation is ratio of actual flow to maximum flow and delay is the stopped time delay per approach vehicle in seconds per vehicle. Approach is the part of an intersection leg that is used by traffic approaching the intersection.¹⁰

Indonesian Highway Capacity Manual (IHCM)

In this study, capacity, degree of saturation, and delay as performance measurements at unsignalized intersection in large cities in Indonesia is evaluated based on methodology in Indonesian Highway Capacity Manual 1997.¹¹ Capacity in pcu/h is defined as follow:

$$C = C_0 \times F_W \times F_M \times F_{CS} \times F_{RSU} \times F_{LT} \times F_{RT} \times F_{MI} \quad (1)$$

where C_0 is basic capacity (pcu/h) and F_W , F_M , F_{CS} , F_{RSU} , F_{LT} , F_{RT} , and F_{MI} are correction factors of entry width (W), median of major road (M), city size (CS), environmental condition (RSU), side friction, and unmotorized (RSU), left turn (LT), right turn (RT), and minor road traffic flow ratio (MI), respectively.

Degree of saturation (DS) is the ratio of total flow to capacity (Q_{TOT}), therefore it can be defined as follow:

$$DS = \frac{Q_{TOT}}{C} \quad (2)$$

While unsignalized intersection delay (D) consists of traffic delay (DT) in sec/pcu and geometric delay (DG) in sec/pcu and can be defined as follow:

$$D = DT + DG \quad (3)$$

where

$$DT = 2 + 8.2078 \times DS - (1 - DS) \times 2$$

for $DS \leq 0.6$ and

$$DT = \frac{1.0504}{(0.2742 - 0.2042 \times DS)} - (1 - DS) \times 2$$

for $DS > 0.6$ and

$$DG = 1 - DS \times P_T \times 6 + 1 - P_T \times 3 + DS \times 4$$

for $DS < 1.0$ and

$DG = 4$ for $DS \geq 1.0$ and PT is turning traffic flow to total traffic flow ratio

CASE STUDY

Case study was carried out at Rajawali-Dadali unsignalized intersection in Bandung, Indonesia. Figure 1 presents the location of the intersection in the city and Figure 2 presents traffic condition where "angkots" as local public transportation mode in Bandung parked near the intersection, although there is "no-stopping" sign at the intersection.

Rajawali-Dadali unsignalized intersection is chosen because this intersection is one of congested unsignalized intersections in Bandung. Survey was carried out on weekdays and weekends during morning peak hour (07:00 – 08:00 am), off peak hour (12:00 am – 01:00 pm), and afternoon peak hour (04:00 – 05:00 pm).

DATA COLLECTION

Two data sets was collected at Rajawali-Dadali unsignalized intersection.¹² Previously, identification of side frictions at intersection and evaluation of how to reduce the side frictions had been done. The first collection data set was carried out without the presence of police officers at intersection and the second was carried out with the presence of police officers. Geometric data, environmental data, traffic flow data, and side friction data will be discussed in this section. Stop watch, video camera, meter, and field data forms were used during field data collection. Police officers from Police Station of The West Bandung City assisted surveyors during field data collection.

Geometric Data

Geometric data at congested intersection Rajawali-Dadali consists of number of leg intersections, number of lanes, and lane width. Figure 3 shows the geometric data and traffic movements at the intersection.



Fig. 1. The Location of Rajawali-Dadali Unsignalized Intersection in Bandung, Indonesia (Sumber: © 2010 Google Map Data – Tele Atlas).¹³

Table 1. Environmental Data at Rajawali-Dadali Unsignalized Intersection.

Approach	Street Type	Approach Width	Environmental Type	City Size
Rajawali street	4/1 UD	7.2 m	CBD	Large
Dadali street	2/2 UD	2.0 m	Residential area	

Table 2. Traffic Flow Data at Rajawali-Dadali Unsignalized Intersection during Weekdays.

Veh Type	Traffic flow (veh/h) without the presence of police officers						Traffic flow (veh/h) with the presence of police officers					
	Rajawali Approach			Dadali Approach			Rajawali Approach		Dadali Approach			
	MP		OP	AP		MP	OP	MP	MP			
	LT	ST	LT	ST	LT	ST	LT	ST	LT			
LV	231	1,505	201	1,498	228	1,518	201	166	208	263	1,520	251
HV	0	36	0	35	0	30	0	0	0	0	35	0
MC	366	2,548	320	2,492	372	2,536	262	227	271	411	2,613	280
UM	33	86	39	81	37	82	41	37	40	24	82	30

Note: MP = morning peak hour LT = left turn LV = light vehicle
 OP = off peak hour ST = straight through HV = heavy vehicle
 AP = afternoon peak hour MC = motor cycle
 UM = unmotorized



Fig. 2. Existing Traffic Conditions at Rajawali – Dadali Unsignalized Intersection.

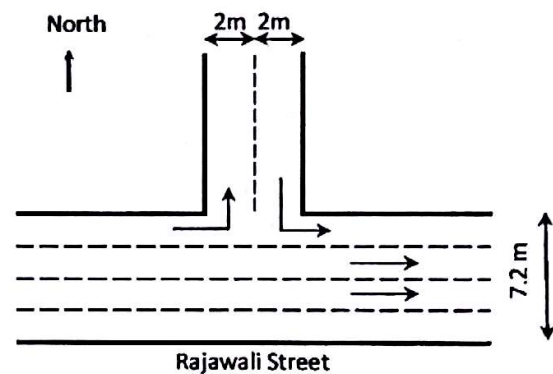


Fig. 3. Geometric and Traffic Movements Data at Rajawali - Dadali Unsignalized Intersection.

Environmental Data

Based on Indonesian Highway Capacity Manual, 1997,¹¹ environmental data consists of city size (small, medium, large city) and environmental type (CBD or residential area). Since population of the city of Bandung is 2,364,312 million people, therefore the city size is categorized as large (population between 1 up to 3 million people). Table 1 presents environmental data of the intersection.

Traffic Flow Data

Two data sets of traffic condition was carried out at the intersection. The first was existing traffic flow without the presence of police officers at the intersection and the second was those with the presence of police officers. The presence of police officers only during morning peak hour since during off peak hour and afternoon peak hour police officers are on duty at other intersections. The data is presented in Table 2 for traffic flow during weekdays and in Table 3 for those during weekends. Correction factors

for light vehicle, heavy vehicle, and motor cycle are 1.0, 1.3, and 0.2, respectively.¹¹

Side Friction Data

Side friction level is high if traffic flow at the entry and the exit is reduced by road side activities in the approach, such as public transit stops, pedestrian walking along and accros the approach, and exit and entries from and to road side properties. Whereas, side friction level is low if traffic flow at the entry and the exit is not reduced by all road side activities.¹¹

Side friction at unsignalized intersection is defined based on weight frequency of every activity at road side per hour per 200 meter.¹¹ Regarding identification of existing side frictions, there are 4 categories of the activities, i.e. pedestrian activities, parking activities, vehicle enter to or exit from a property, and vehicle that move slowly. Side friction data at Rajawali-Dadali unsignalized intersection is presented in Table 4.

performance measurements are determined based on methodology in Indonesia Highway Capacity Manual 1997 for unsignalized intersections in large city in Indonesia.¹¹

Results of analyses of capacity, degree of saturation, and delay are presented in Table 5. Table 5 shows that all performance measurements during weekdays are similar with those during weekends. Capacity of intersection was high (around 4,000 pcu/h) with very high degree of saturation (more than 0.75). The condition influenced the value of delay and indicated that traffic condition at unsignalized intersection was very congested during weekdays and weekends.

Table 5 also shows that performance of intersection increase with the presence of police officers at intersection. In more detail, capacity increased of 8.22 percent, degree of saturation decreased of 2.54 percent, and delay decreased of 3.44 percent during weekdays. While during weekends, capacity increased of 8.70 percent, degree of saturation decreased of 2.89 percent, and delay decreased of 6.42 percent. The traffic condition occurred since road users, especially angkot drivers, adhered to the traffic regulation i.e. did not stop or park near intersection. On one aspect the presence of police officers at intersection was beneficial in term of increase the performance of intersection; but on the other side, the condition did not educate road users. Road users only adhered to the traffic regulation to avoid getting traffic ticket from police officer. Moreover, police officers could not always present at unsignalized intersection because of limited number of personnel.

Therefore, for this kind of unsignalized intersection, where traffic signs is not effective and the presence of police officers cannot increase the performance of intersection significantly, it is recommended to change it into signalized intersection, especially using SCATS (Sydney Coordinated Adaptive Traffic Systems) as the advanced traffic control systems (ATCS) implemented to a number of intersections in Bandung.

FURTHER RESEARCH

Implementation of recommendation to change the unsignalized intersection into signalized intersection is needed. If the performance measurements of signalized intersection are better significantly than performance measurements of unsignalized intersection with the presence of police officers, then the recommendation can be one of problem solvings to reduce severe traffic congestion in large cities, at least in Indonesia. However, permission from Bandung Road Authority, number of surveyors, time, and financial support should be available to do the further research.

CONCLUSIONS

Unsignalized intersections are the greatest number of intersections in large city Bandung in Indonesia. The intersection is the location with high potential traffic congestion. Side friction reduction cause decrease in traffic congestion and then increase the performance of intersection. Traffic signs at intersection cannot force road

users, especially angkot drivers to adhere to the traffic regulation. Therefore, the presence of police officers is needed.

The presence of police officers increase the performance of intersection in terms of capacity, degree of saturation, and delay. However, police officers cannot always present at unsignalized intersection and the condition did not educate road users to adhere to traffic regulation. Therefore, for this kind of very congested unsignalized intersection, it is recommended to change it into signalized intersection, especially using advanced traffic control systems (ATCS) as is implemented to a number of intersections in Bandung.

ACKNOWLEDGMENTS

The authors wish to express their gratitude and sincere appreciation to the police officers at Police Station of West Bandung City for the assistance during field data collection for the purpose of this study.

REFERENCES

1. Statistical Bureau of Bandung Municipality. "Bandung in Statistics 2007", 2007.
2. Samsat Kota Bandung. "Data of Number of Vehicles in Bandung up to October 2008", 2008. <http://ditlantaspoldajabar.blogspot.com>, accessed July 2009.
3. Sutandi, A. C. "Advanced Traffic Control Systems Impacts on Environmental Quality in a Large City in a Developing Country," *Journals of Eastern Asia Society of Transportation Studies*, Volume 7, ISSN: 1881-1124, 2007, pp. 1169 - 1179.
4. American Association of State Highway and Transportation Officials (AASHTO) Strategic Highway Safety Plan (SHSP). "Unsignalized Intersection Collisions," 2010. available at http://safety.transportation.org/htmlguides/UnsigInter/exec_sum.htm, accessed March 2010.
5. Pan, F.; Zhang, L.; and Lu, J., "Unsignalized Intersection Level of Service Based on Safety", *Journal of American Society of Civil Engineers (ASCE)*, pp. 645-652, 2008. available at [http://dx.doi.org/10.1061/40995\(322\)60](http://dx.doi.org/10.1061/40995(322)60), accessed March 2010.
6. U.S. Department of Transportation Federal Highway "A Guide for Addressing Unsignalized Intersection Collisions Unsignalized Intersection Safety Strategies," Administration Office of Safety. NCHRP Report 500, Volume 5, July 2008. available at http://safety.fhwa.dot.gov/intersection/unsiginter/presentations/nchrp500_v5/, accessed March 2010.
7. Khisty, J. G.; and Lall, K. B., "Transportation Engineering An Introduction," Second edition, Prentice Hall, Inc., Upper Saddle River, New Jersey 07458, 1998.
8. Transport Canada, Road Safety and Motor Vehicle Regulation Directorate. "Measuring Safety at Unsignalized Intersections and Establishing a Process for Determining Traffic Signal Safety Warrants", Synectics Transportation Consultants Inc, 2003.

9. Ogden, K.W.; and Taylor, S.Y., "Traffic Engineering and Management," Institute of Transport Studies, Department of Civil Engineering, Monash University, Clayton Vic 3168, Australia, 1999.
10. American Association Of State Highway And Transportation Officials (AASHTO), "A Policy On Geometric Design of Highways And Streets," Washington D.C, 2001.
11. Directorate General of Highways, Republic of Indonesia, "Indonesian Highway Capacity Manual 1997 (IHCM, 1997)", Directorate General of Highways, Directorate of Urban Road Development, Ministry of Public Works Republic of Indonesia, 1997.
12. Novaliya, "Pengaruh Pengurangan Hambatan Samping Terhadap Kemacetan Lalulintas Simpang Antara Jalan Rajawali dan Jalan Dadali Bandung," Thesis, Civil Engineering Department, Faculty of Engineering, Parahyangan Catholic University, Bandung, Indonesia, 2009.
13. Google Maps, 2010, <http://maps.google.com/>, visited: 21 October 2010.

INDEX

- Abdurrosyid, J.** 1, 28-29, 35
Aggregate 1, 10, 12-15, 17, 19, 20, 21-24, 26-27
 interlock 1, 10, 12-14, 17, 19, 26
Anggoro, R. 47, 55
Angkot 47-49, 52-53
 drivers 48, 52-53
Anwar, N. 68
Appraisal 47, 68
Asphalt 1, 20-24, 26-27
Buana, C. 47, 75
Clear-Water 1, 28-29, 31-35
 scour 1, 28-35
Compressive 1, 10, 12-13, 16, 20, 23-26
 strength 1, 13, 16, 20, 23-24, 26
Computer 10, 55-57, 60, 65, 69, 70-71, 73
 simulation 55-56
Construction 1, 20-21, 26-27, 47, 68, 73
 demolition waste 1, 20-21, 26
Creep 1, 20, 22, 24, 26
Current 20, 47, 55, 58, 75, 83-87
 direction 75
 velocity 75
Depth of Scour 1, 28
Distributed 5, 13, 47, 55-60, 67
 computing 47, 55-59, 67
Dowel 1, 10, 12, 14, 16-19
 action 1, 10, 12, 14, 17, 19
Estuary 75
Fatchan, A. K. 1, 28
Finite 1, 10, 55-57, 67, 96
 element 1, 10, 55-57, 96
Framed 47, 89, 96
 type machine foundation 47, 89
Grid 16, 47, 55-59, 61, 67, 75
 computing 47, 55-56, 67
Harmonic 47, 89, 96
 response 47, 89
Herijanto, W. 75
High-Strength 1, 10, 13-14, 17, 19
 concrete 1, 10, 13-14, 17
Household 1-6, 8-9
 characteristics 1-4, 9
Immaduddin, M. 47, 89,
Internet 47, 55-58, 60, 65, 67
Iranata, D. 47, 55, 59
Irrigation 47, 68
 System 47, 68
Istiar 75
Kartika, A. A. G. 75
Kini, L. 47, 68
Lamong Bay 47, 75
Machinery 47, 89, 96
 foundation 47, 89
Motorcycle 1-9
 ownership 1-9
Multi Criteria 68
 Decision Making 68
Multinomial 1-3, 5, 8
 logit 1-3, 6, 8
Novaliya 47, 48, 54
Performance 1, 20-24, 26-27, 36, 41-42, 45, 47-49, 52-53, 55, 60-61, 68-73
 based design 36, 42
 of unsignalized intersection 47-49, 52
Prastyanto, C. A. 75
Pushover 1, 36-39, 41-45
 analysis 1, 36, 45
Rahardjo, B. 75
Scour Pattern 1, 28
Shear 1, 10, 12-15, 17, 19, 44, 45
Side Friction 47-53
 reduction 47-48, 53,
Sidharta, A. S. 89
Sidharti, S. 68
Soegihardjo, H. 89
Soil 47, 89, 96
 structure interaction 47, 89, 96
Stiffness 47, 89
Structural 1, 14, 19, 40, 42, 47, 55-60, 62-65, 67, 89, 96
 system 47, 55-58, 62-63, 65, 67, 96
Sudarto 1, 36
Suprpto, K. 1, 36
Sustainable 47, 68, 70, 74-75
Sutandi, A. C. 47-48, 53,
Tanjung Perak Port 47, 75, 77, 82-84, 88
Tavio 1, 10, 45
Thanaya, I. N. A. 1, 20, 27
Tilong 47, 68-69, 71-75
Time History 1, 36, 42
 analysis 1, 36, 42
Traffic 2, 8, 47-55
 congestion 2, 47-48, 53
Unsignalized 47-53,
 intersection 47-53
Wedagama, D. M. P. 2
Widyastuti, H. 75